

FOCUS-10 KKRFL50R


Specification sheet

Outdoor

Outdoor

KKDÖ ITALY

Dimension	H103mm x W103mm x Ø57mm
Chip	High Power LED
LED	5050 LED x1
Beam Angle	8° / 15° / 30° / 45° / 60°
CCT	2700K / 3000K / 4000K / 5000K / 2700K-6500K
Operating Temp.	Ta = -40 to 50°
IP Rating	IP66
IK Rating	IK08
Housing	Body: Die-Cast Aluminum ADC12 Cover: Tempered Glass
Finish Options	Standard Color / Silver Grey
Mounting	Pedestal Mount
Adjustable	+90° / -30°
Accessory	Honeycomb / Deepcomb / Bullseye / Cylindrical Screen / Spike M5 Screw
Protection Factor	Class III
Control	ON/OFF / 0-10V (External) / DMX / DALI (External)
Certification	CE
Warranty	3 Years
Weight	0.35kg

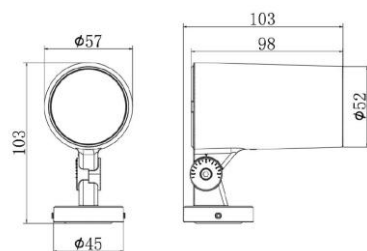

PRODUCT MODEL @ 3000K

Input Voltage	24VDC (External PSU, build-in LED driver)
System Power	10W
Efficacy(lm/W)	60±10% (8°/15°) , 95 ±10% (30°/45°)



Deepcomb (Y8) Honeycomb (Y2) Bullseye (Y9) Cylindrical Screen (Y)



Spike M5 Screw (SPM5/160)

