



ONDA-LINE NANO^{NS-625}

Specification sheet
Indoor | Outdoor



L70 B10
> 50000h


CE

RoHS
Compliant


LM79
Tested

LM80
Tested


TM-30
Results

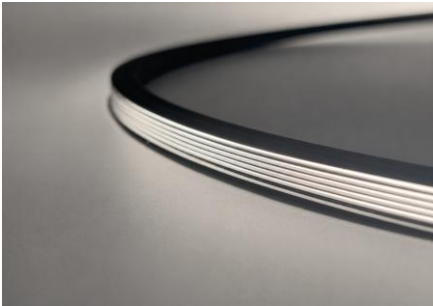

Dimension	H10mm x W10mm x L5000mm(Max)
PCB Increment	Free-cutting to be any length
LED/m	196
Chip	SMD2835
Cover/Optics	35°
Bend type	Top-Bend
CCT	2700K / 3000K / 3500K / 4000K / 5000K / 6000K
CRI	90
Bin	3-Step MacAdam Ellipse
Lifetime	50,000 hours
Operating Temp.	Ta = -20 to 45°C
IP Rating	IP54
Mounting	Bracket / Aluminum channel / Bendable Bracket
Power feed	Tail Feed / Side Feed / Bottom Feed
Control	0-10V / 1-10V / PWM
Certification	CE , UL
Warranty	5 Years
Weight	0.15Kg/m
Max run	5000mm (from one power feet)



PRODUCT DATA	@ 4000K
Power Consumption	12W/m
Supply voltage	24V DC
Lumen/m	156lm/m
Lumen/W	13lm/W



PERFORMANCE DATA @4000K														
R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
94	98	98	92	93	94	93	87	70	93	92	69	96	99	92




ONDA-LINE NANO

Options
Indoor | Outdoor



DIMENSIONS VARY BY CABLE EXIT TYPE

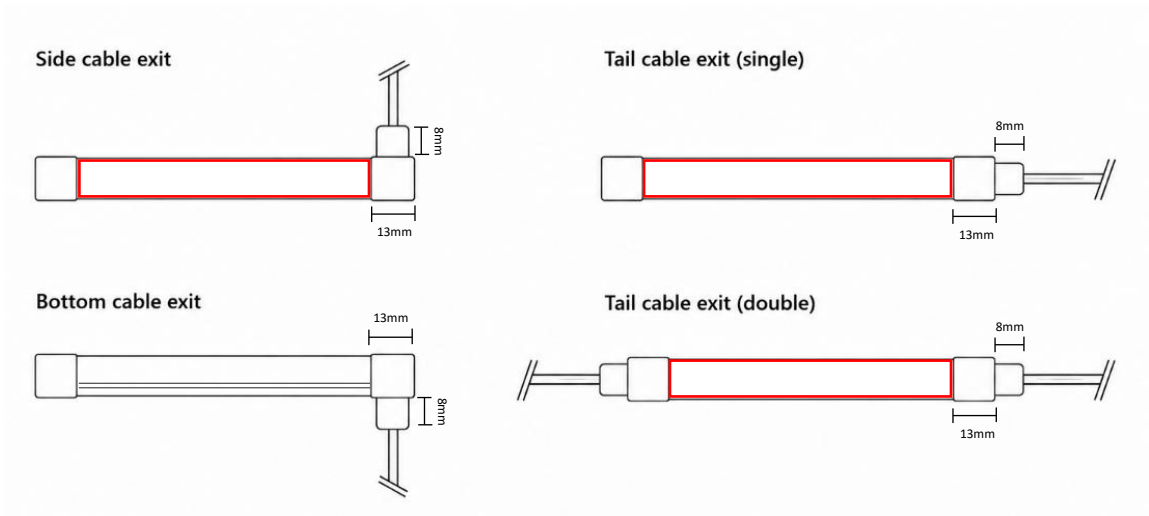


MOUNTING ACCESSORIES

Note: Accessories are to be ordered separately with corresponding code shown below.




Clip

- Steel finish
- Allow 6 per metre



Aluminum Channel



Bendable Channel

