

Outdoor

SHADE-LWW57

GS72WA05-P05


Specification sheet

Indoor | Outdoor

KKDÖ

ITALY

Dimension	H46mm x W57mm
Lamp/Luminaire	Bridgelux
Beam Angle	5°
CCT	3000K
Bin/Step	≤5
CRI	Ra≥90
Lifetime	50000h
Operating temp	-40° ~ 50°
IP Rating	IP65
IK Rating	IK05
Finish	Gray
Material	Aluminium
Mounting	Adjustable Bracket
Accessories	Anti-Glare Louvre
Control	ON/OFF / DALI / 1-10V / DMX
Certification	CE




Unit : mm

PRODUCT DATA

@ 3000K

Power Consumption	72W
Supply voltage	24V DC
Lumen/m	3329lm (without louvre)
	2244lm (with louvre)

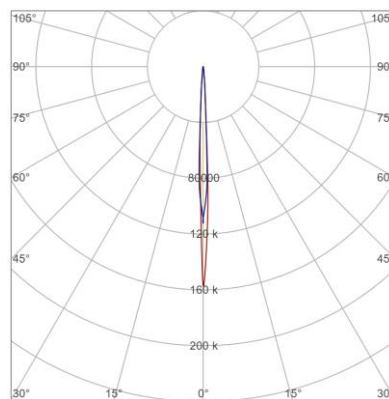

- Stretched aluminum body
- Multiple optics design Multiple installation methods
- Anti-glare louver designs
- Powder coating with UV-resistant
- Salt spray test duration >1000h