

Outdoor

# TWIST-20

DM180-TF15WA20Q37-LV


Specification sheet

Indoor | Outdoor

# KKDČ

ITALY

|                                  |                             |
|----------------------------------|-----------------------------|
| Dimension                        | H163mm x $\phi$ 181mm       |
| Lighting Type                    | In-ground light             |
| Lamp/Luminaire                   | Bridgelux                   |
| Beam Angle                       | 20°                         |
| CCT                              | 3000K                       |
| Bin/Step                         | ≤5                          |
| CRI                              | Ra≥90                       |
| Lifetime                         | 50000h                      |
| Operating temp                   | -40° ~ 50°                  |
| Product Salt Spray Test Duration | > 1000h                     |
| IP Rating                        | IP65                        |
| IK Rating                        | IK10                        |
| Finish                           | Gray                        |
| Material                         | Stainless steel + Aluminium |
| Rotation Angle                   | +30° ~ -15°                 |
| Accessories                      | Anti-Glare Louvre           |
| Control                          | ON/OFF / DALI / 1-10V / DMX |
| Certification                    | CE                          |

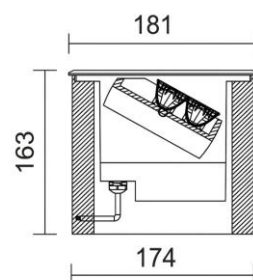


Unit : mm

## PRODUCT DATA

@ 3000K

|                   |                                                |
|-------------------|------------------------------------------------|
| Power Consumption | 15W                                            |
| Supply voltage    | 24V DC / 220V AC                               |
| Lumen/m           | 1475lm (without louvre)<br>594lm (with louvre) |

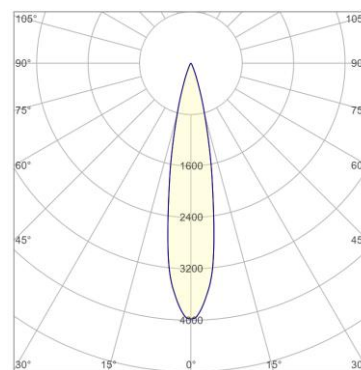

- Surface : 316 stainless steel
- Glass: Hardened safety tempered glass (wear-resistant)
- Static load resistance of flanged housing: 2000 Kg
- Luminaire body material: CNC-machined 6061 aluminum
- Mounting part material: Hard anodizing on both the luminaire body and pre-embedded mounting box, featuring high corrosion resistance
- (suitable for soils with different salinity levels)
- Salt spray test duration > 1000h