




ONDA-LONGRUN^{NS-131}

Specification sheet
Indoor | Outdoor




L70 B10 > 50000h	CE	III	RoHS Compliant	LM79 Tested	LM80 Tested	TM-30 Results
---------------------	----	-----	-------------------	----------------	----------------	------------------

Dimension	H16mm x W16mm
PCB Increment	50mm
LED/m	120
Chip	2835
Cover/Optics	120°
Bend type	Top bend
CCT	2700K / 3000K / 3500K / 4000K
Bin	3-Step MacAdam Ellipse
CRI	90
TM 30-15 R _q	99
TM 30-15 R _f	91
Lifetime	50,000 hours @ 25°C
Operating Temp.	T _a = -25 to 45°C (T _c ≤65°C)
IP Rating	IP68 / IP69K
Mounting	Bracket / Aluminum channel / Clip
Power feed	Rear Feed / Side Feed / Bottom Feed
Control	0-10V / 1-10V / DMX / DALI
Certification	CE
Warranty	3 Years
Weight	0.4kg/m
Max run	20m / 30m / 50m



PRODUCT DATA	@ 3000K
Power Consumption	14W/m
Supply voltage	24V DC
Lumen/m	820lm/m
Lumen/W	59lm/W

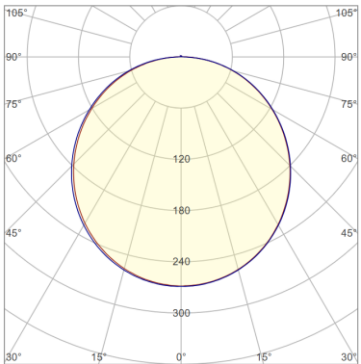

PERFORMANCE DATA @3000K													
R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
98	97	96	96	98	92	90	85	70	97	99	81	99	99



ONDA-LONGRUN

Length Availability List
Indoor | Outdoor



Length Code	Fixture Length (mm) ¹	LED Strip (mm) ²	End Cap Dimension (mm) ³
m0053	53	50	3
m0103	103	100	3
m0153	153	150	3
m0203	203	200	3
m0253	253	250	3
m0303	303	300	3
m0353	353	350	3
m0403	403	400	3
m0453	453	450	3
m0503	503	500	3
m0553	553	550	3
m0603	603	600	3
m0653	653	650	3
m0703	703	700	3
m0753	753	750	3
m0803	803	800	3
m0853	853	850	3
m0903	903	900	3
m0953	953	950	3
m1003	1003	1000	3
m1053	1053	1050	3
m1103	1103	1100	3
m1153	1153	1150	3
m1203	1203	1200	3
m1253	1253	1250	3



ONDA-LONGRUN

Length Availability List
Indoor | Outdoor



Length Code	Fixture Length (mm) ¹	LED Strip (mm) ²	End Cap Dimension (mm) ³
m1303	1303	1300	3
m1353	1353	1350	3
m1403	1403	1400	3
m1453	1453	1450	3
m1503	1503	1500	3
m1553	1553	1550	3
m1603	1603	1600	3
m1653	1653	1650	3
m1703	1703	1700	3
m1753	1753	1750	3
m1803	1803	1800	3
m1853	1853	1850	3
m1903	1903	1900	3
m1953	1953	1950	3
m2003	2003	2000	3
.	.	.	.
.	.	.	.
.	.	.	.
.	.	.	.
.	.	.	.
.	.	.	.
.	.	.	.
.	.	.	.
.	.	.	.
.	.	.	.
m200003	200003	200000	3


¹ Actual total overall length of light fixture (LED strip + end caps + void/wire hole)
² Actual length of PCB strip
³ Actual length of 2x end caps

DIMENSIONS VARY BY CABLE EXIT TYPE


Side cable exit



Tail cable exit (single)

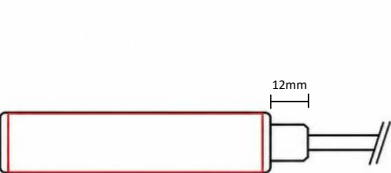

Bottom cable exit



Tail cable exit (double)




MOUNTING ACCESSORIES

Note: Accessories are to be ordered separately with corresponding code shown below.




Clip

- Allow 6 per metre




Clip

- Allow 6 per metre



Aluminum Channel



Bendable Channel

